



Adaptable street lighting through wireless control


AirGlow dramatically reduces power consumption while ensuring street lighting remains safe and effective. It uses advanced autonomous control systems that adjust lighting based on real-time sensor data. When no movement is detected, lights dim or turn off, saving energy. When movement is detected, lights brighten to full illumination within a second, ensuring safety is maintained.

AirGlow is a one-time purchase with no recurring fees, making it an affordable choice for towns and cities. It optimizes energy use and is perfect for lighting pathways, recreational areas and other public spaces.

AIRGLOW PRODUCT RANGE

AirGlow

- DALI2 and D4i certified
- Zhaga Book 18 connector
- Tunable white functionality
- Superior range
- No internet connectivity required

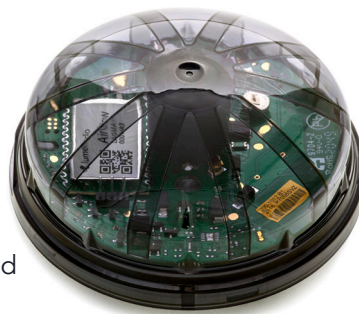


APP

Verify your installation with the LumenRadio AirGlow app



Get the app

Coming soon!



AirGlow Gateway

- Enables remote monitoring and control
- Open cloud interface for third-party software integration
- Failsafe, not dependent on the internet for local lighting controls



ENERGY SAVINGS

Reduce power consumption and energy costs with adaptable street lighting.



UNCOMPROMISED SAFETY


Lighting can be switched to full illumination when movement is detected.



EASY INSTALLATION

Efficient and user-friendly installation means projects are completed quickly.

TECHNICAL SPECIFICATIONS

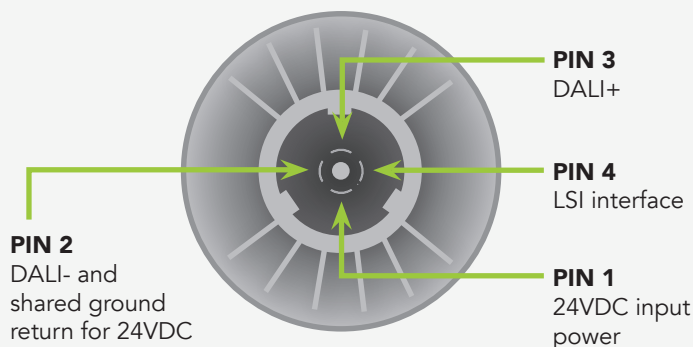

FEATURES

- DALI2 and D4i certified
- Zhaga book 18 compliant hardware
- Astronomical time triggering of scenes
- Time triggering of scenes
- AirGlow will keep local time for up to 12 months in a power less state.
- Presence detection scene triggering via DALI2/D4i Zhaga Book 18 sensors or through LSI interface.*
- Use smartphone app to set up scenes and groups
- Up to 6ch DALI DT6, CW WW RGB A/W
- Presence detection scene triggering sub second respons time

* please refer to the DALI alliance online product database for a full list of DALI-2 certified occupancy sensors

DATA SHEET

Environmental

- Temperature/Humidity
Operational: -40 to +65C / 10% to 90% non condensing
Storage: -40 to +85C / 10% to 90% non condensing
- IP66 rated
- IK09 high impact resistant
- UV protection/salt ingress, protected by enclosure

Electrical

- 24+/-6VDC input voltage
- 250mW nominal power consumption
- 27VDC max on DALI and LSI input pins
- All interfaces ESD protected

Dimensions

80mm diameter x 40mm height

Conformance

- CE/RED
Radio: EN300328 v2.2.2
EMC: EN 301 489-1, EN 301 489-3, EN 301 489-17
Electrical Safety: EN 62311, EN 62368-1+A11, EN 60950-22
- Environmental
IEC 60068-1, IEC 60068-2

Configuration data storage

- Highly secured storage in cloud
- System access controlled by system owner
- All data encrypted for privacy and security

MTTF (Mean Time To Failure)

>100000 hours



WHY CHOOSE LUMENRADIO?

WE KNOW WIRELESS

LumenRadio's unique patented wireless technology predicts and finds the best channel to communicate on. We call it Cognitive Coexistence™ – you can call it peace of mind.

ROCK-SOLID PERFORMANCE

Cognitive Coexistence allows our tech to operate reliably even in the most crowded of spaces so you get interference-free service every time. Where others fail, we deliver.

PROVEN RELIABILITY

From epic stageshows and Hollywood blockbusters to challenging industrial environments and vast buildings, we have been delivering wireless without worries for almost two decades.


CONTACT


Headquarters

 **Sweden, Gothenburg**
LumenRadio AB
Johan Willins gata 6
416 64 Göteborg

+46 31 301 03 70
sales@lumenradio.co

Sales offices

 **Germany, Frankfurt**
+49 619 658 655 590
sales@lumenradio.com

 **US, Boston**
+1 617-901-9382
sales@lumenradio.com